

YALÇIN GOLD BATTERY

3 OPzS 150 (2V150AH)

Specification

Nominal Voltage	2V	
Capacity(10HR)	150.0AH (1.8V/cell,20 °C)	
Dimension	Length	103±2mm (4.06 inches)
	Width	206±3mm (8.11 inches)
	Container Height	355±3mm (13.98 inches)
	Total Height (with Terminal)	410±3mm (16.14 inches)
Approx Weight	Without Electrolyte	10.8 kg (23.8lbs)
	With Electrolyte	15.3 kg (33.7lbs)
Container Material	SAN transparent container	
Rated Capacity	150.0 AH/15.0A	(10hr, 1.80V/cell, 20°C/68°F)
	133.0 AH/26.6A	(5hr, 1.75V/cell, 20°C/68°F)
	115.8 AH/38.6A	(3hr, 1.75V/cell, 20°C/68°F)
	85.7 AH/85.7A	(1hr, 1.60V/cell, 20°C/68°F)
Max. Discharge Current	1200A (5s)	
Internal Resistance	Approx 1.15mΩ	
Operating Temp.Range	Discharge	-15~55°C (5~131°F)
	Charge	0~45°C (32~113°F)
	Storage	-15~45°C (5~113°F)
Type and number of poles	M8/2	
Charging	Floating voltage: 2.23V~2.25V at 20 °C(68°F)Temp.	
	Boost charge: 2.30V~2.40V at 20 °C(68°F)Temp.	
	Charging current(max.): 0.1CA	
	Temp.Coefficient -3mV/°C	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge (4% per month)	Gold OPzS batteries may be stored for up to 6 months at 20°C(68°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	

Applications

- ◆ Telecommunications.
- ◆ Radio and cellular telephone relay stations.
- ◆ Emergency lighting systems.
- ◆ Power stations, Conventional power stations,
- ◆ Alternative power (solawind).
- ◆ Large UPS and computer back-up.
- ◆ Railway signalling.
- ◆ Maritime standby power on ships and ashore.
- ◆ Standby power
- ◆ Buoy lighting.
- ◆ Long service life, designed life 15-20 years.

Constant Current Discharge (Amperes) at 20 °C (68°F)

F.V/Time	30mi n	45mi n	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V/cell	113.7	98.8	85.7	67.5	55.8	41.7	33.5	28.4	24.5	19.4	16.0	8.70
1.65V/cell	106.8	95.0	82.8	65.8	54.5	41.0	33.0	28.0	24.2	19.2	15.9	8.62
1.70V/cell	101.4	89.6	79.7	63.7	53.3	39.8	32.3	27.4	23.7	18.8	15.6	8.50
1.75V/cell	95.1	85.4	75.6	60.7	51.0	38.6	31.3	26.6	23.2	18.5	15.3	8.36
1.80V/cell	84.6	77.0	69.6	56.9	47.9	36.6	30.0	25.5	22.3	18.0	15.0	8.20
1.85V/cell	67.5	63.8	59.6	50.6	43.5	33.5	27.7	23.9	21.0	17.1	14.4	7.88

Constant Power Discharge (Watts) at 20 °C (68°F)


F.V/Time	30mi n	45mi n	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V/cell	194.1	172.9	152.1	121.3	101.5	76.4	61.9	52.7	45.9	36.5	30.3	16.5
1.65V/cell	186.3	168.2	148.2	118.9	99.6	75.5	61.3	52.3	45.5	36.3	30.1	16.4
1.70V/cell	179.3	160.3	143.7	115.9	97.7	73.6	60.2	51.4	44.8	35.8	29.7	16.2
1.75V/cell	171.0	154.4	137.7	111.2	94.3	71.7	58.6	50.2	43.9	35.3	29.3	16.0
1.80V/cell	154.2	141.4	128.3	105.4	89.4	68.6	56.5	48.4	42.5	34.5	28.8	15.8
1.85V/cell	125.1	118.8	111.4	95.0	82.0	63.5	52.8	45.8	40.4	33.1	27.8	15.3

Specifications subject to change without notice.




Dimensions


Terminal

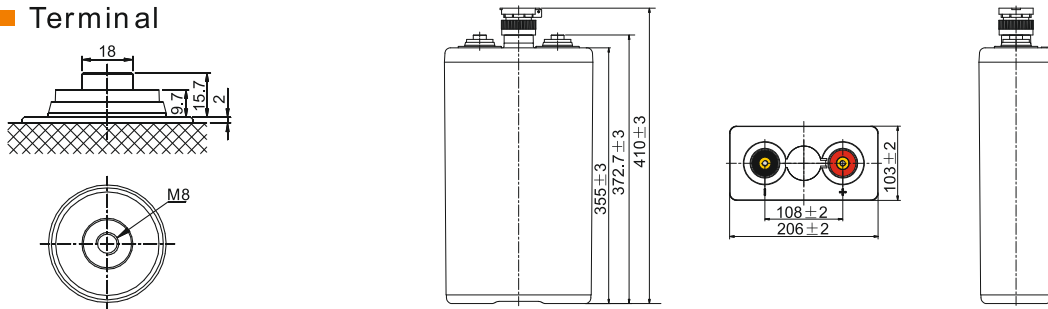


Discharge Characteristics

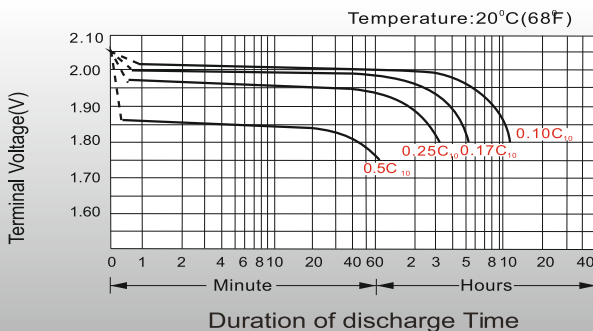


Charge voltage Vs ambient temperature curve

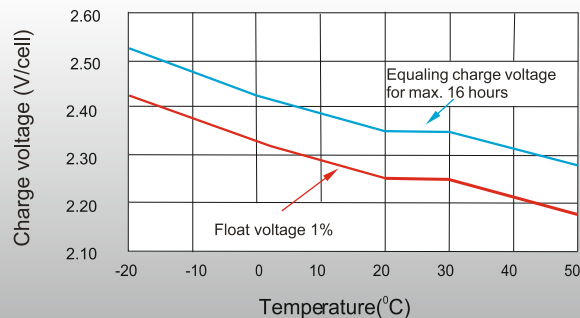


Discharge capacity Vs Ambient temperature curve (I10A)

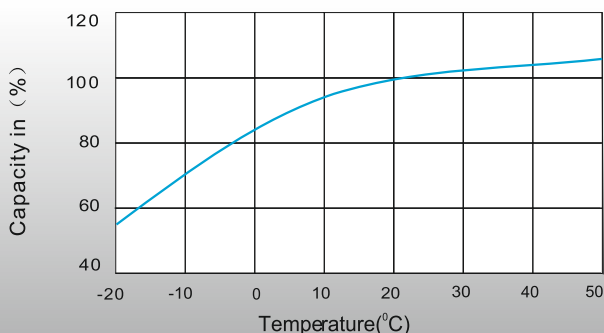

Relation curves of service life and ambient temperature

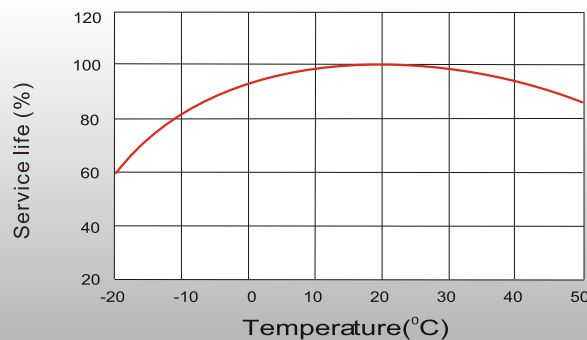

Self Discharge Characteristics

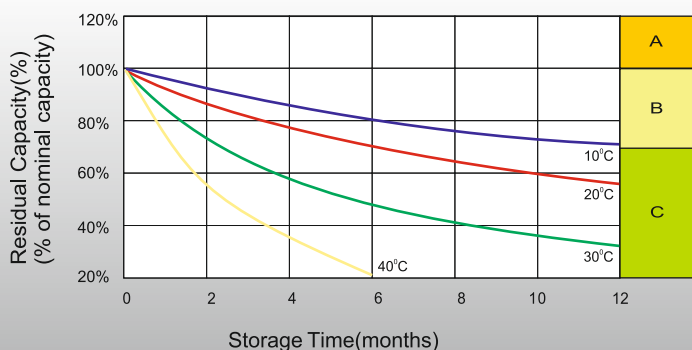

- A** No supplementary charge required (Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below :
 1. Charge for above 3 days at limited current 0.1CA and constant voltage 2.25V/cell.
 2. Charge for above 20 hours at limited current 0.1CA and constant voltage 2.45V/cell.
 3. Charge for 8~10 hours at limited current 0.05CA .
- C** Supplementary charge may often fail to recover the capacity .
The battery should never be left standing till this is reached.



Merkez

100. Yıl Bulvarı 1232. Sokak
(Eski 40. Sokak) No: 65
Ostim / ANKARA



Tel&Fax

T. (0.312) 354 16 45
(0.312) 385 55 60
F. (0.312) 354 07 97



Servis

100. Yıl Bulvarı 1234. Sokak
(Eski 57. Sokak) No: 91
Ostim / ANKARA



Fabrika

Kırıkkale OSB Kızılırmak Caddesi
4. Sokak No: 6
Yahşihan / KIRIKKALE