

YALÇIN GOLD BATTERY

GB06001.2 (6V1.2AH)

Specification

Nominal Voltage	6V		
Nominal Capacity(20HR)	1.2AH		
Dimensions	Length	97 ± 1mm	(3.82 inches)
	Width	24 ± 1mm	(0.94 inches)
	Container Height	51.5 ± 1mm	(2.03 inches)
	Total Height (with Terminal)	57.5 ± 1mm	(2.26 inches)
Approx Weight	Approx 0.29 kg (0.64lbs)		
Terminal	T1		
Container Material	ABS		
Rated Capacity	1.20 AH/0.060A	(20hr , 1.80V/cell, 25℃/77℉)	
	1.12 AH/0.112A	(10hr, 1.80V/cell, 25℃/77℉)	
	1.01 AH/0.202A	(5hr, 1.75V/cell, 25℃/77℉)	
	0.882 AH/0.294A	(3hr, 1.75V/cell, 25℃/77℉)	
	0.728 AH/0.728A	(1hr, 1.60V/cell, 25℃/77℉)	
Max. Discharge Current	18A (5s)		
Internal Resistance	Approx 65mΩ		
Operating Temp.Range	Discharge : -15 ~ 50℃ (5 ~ 122℉)		
	Charge : 0 ~ 40℃ (32 ~ 104℉)		
	Storage : -15 ~ 40℃ (5 ~ 104℉)		
Nominal Operating Temp. Range	25 ± 3℃ (77 ± 5℉)		
Cycle Use	Initial Charging Current less than 0.36A.Voltage		
	7.2V~7.5V at 25 ° C(77 ° F)Temp. Coefficient -15mV/℃		
Standby Use	No limit on Initial Charging Current Voltage		
	6.75V~6.9V at 25 ° C(77 ° F)Temp. Coefficient -10mV/℃		
Capacity affected by Temperature	40 ° C (104 ° F)	103%	
	25 ° C (77 ° F)	100%	
	0 ° C (32 ° F)	86%	
Self Discharge	Yalcin Gold batteries may be stored for up to 6 months at 20 ° C(68 ° F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.		



Applications

- ◆ All purpose
- ◆ Uninterruptable Power Supply (UPS)
- ◆ Electric Power System (EPS)
- ◆ Emergency backup power supply
- ◆ Emergency light
- ◆ Railway signal
- ◆ Aircraft signal
- ◆ Alarm and security system
- ◆ Electronic apparatus and equipment
- ◆ Communication power supply
- ◆ DC power supply
- ◆ Auto control system

Constant Current Discharge (Amperes) at 25 C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	2.30	1.61	1.32	1.15	0.922	0.709	0.580	0.354	0.270	0.222	0.188	0.163	0.130	0.108	0.059
1.80V/cell	2.83	1.92	1.54	1.30	1.02	0.773	0.624	0.376	0.284	0.233	0.196	0.170	0.134	0.112	0.060
1.75V/cell	3.36	2.17	1.69	1.41	1.09	0.821	0.656	0.392	0.294	0.240	0.202	0.174	0.138	0.114	0.061
1.70V/cell	3.81	2.39	1.83	1.52	1.14	0.853	0.684	0.409	0.303	0.246	0.207	0.179	0.140	0.116	0.062
1.65V/cell	4.20	2.57	1.94	1.59	1.19	0.886	0.713	0.421	0.311	0.251	0.211	0.182	0.142	0.117	0.063
1.60V/cell	4.41	2.68	2.02	1.65	1.23	0.906	0.728	0.434	0.318	0.258	0.216	0.186	0.145	0.119	0.063

Constant Power Discharge (Watts/cell) at 25 C (77°F)



F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	4.35	3.06	2.55	2.23	1.80	1.39	1.14	0.701	0.536	0.442	0.377	0.327	0.261	0.217	0.120
1.80V/cell	5.28	3.61	2.93	2.50	1.98	1.51	1.22	0.741	0.560	0.462	0.390	0.339	0.269	0.224	0.121
1.75V/cell	6.18	4.05	3.20	2.70	2.10	1.59	1.28	0.768	0.577	0.474	0.399	0.345	0.274	0.226	0.121
1.70V/cell	6.93	4.42	3.43	2.88	2.19	1.64	1.33	0.796	0.592	0.483	0.406	0.352	0.277	0.229	0.122
1.65V/cell	7.54	4.69	3.59	2.99	2.26	1.70	1.37	0.814	0.604	0.490	0.413	0.357	0.280	0.231	0.124
1.60V/cell	7.79	4.82	3.70	3.05	2.30	1.72	1.39	0.834	0.615	0.499	0.419	0.362	0.284	0.234	0.124

Specifications subject to change without notice.


Dimensions

T1 Terminal


Unit: mm [inches]

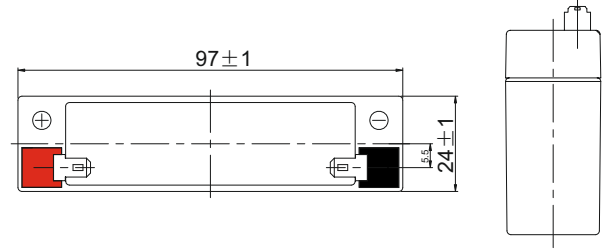


Discharge Characteristics

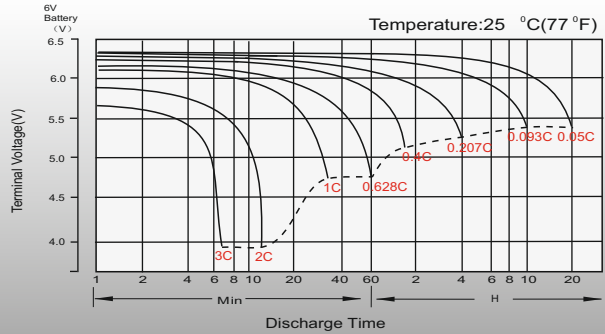


Float Charging Characteristics

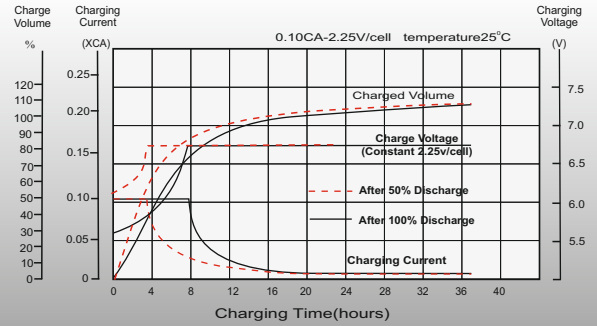


Temperature Effects in Relation to Battery Capacity

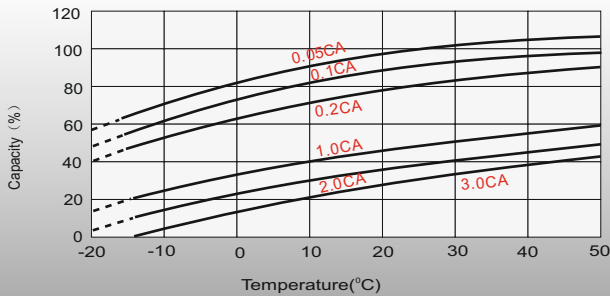


Effect of Temperature on Long Term Float Life

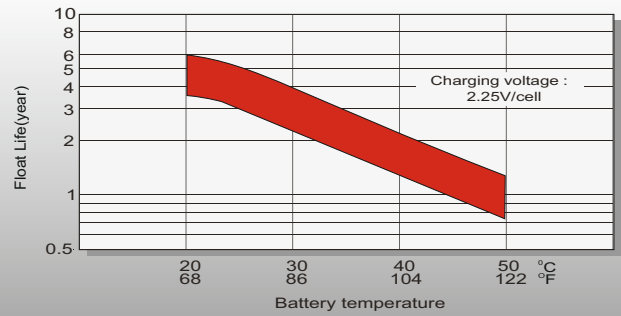

Cycle Life in Relation to Depth of Discharge

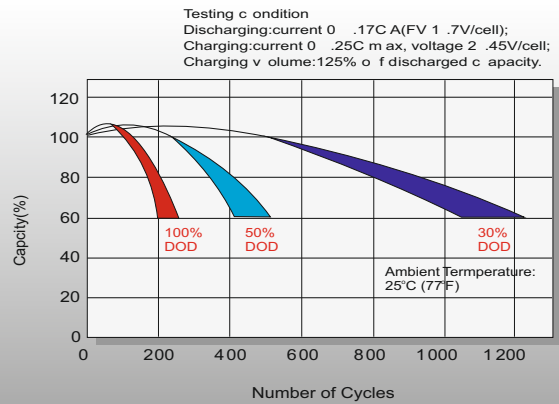

Self Discharge Characteristics

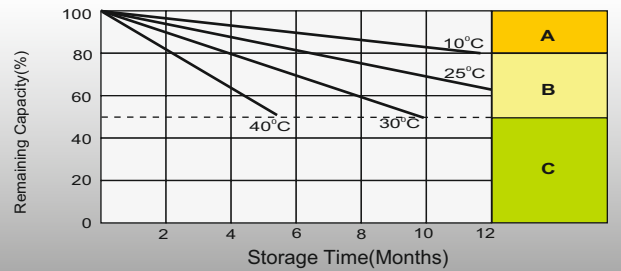

A No supplementary charge required
(Carry out supplementary charge before use if 100% capacity is required.)

Supplementary charge required before use. Optional charging way as below:
1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.
3. Charged for 8~10 hours at limited current 0.05CA.

C Supplementary charge may often fail to recover the capacity.



Merkez

100. Yıl Bulvarı 1232. Sokak
(Eski 40. Sokak) No: 65
Ostim / ANKARA



Tel&Fax

T. (0.312) 354 16 45
(0.312) 385 55 60
F. (0.312) 354 07 97



Servis

100. Yıl Bulvarı 1234. Sokak
(Eski 57. Sokak) No: 91
Ostim / ANKARA



Fabrika

Kırıkkale OSB Kızılırmak Caddesi
4. Sokak No: 6
Yahşihan / KIRIKKALE